

GaAs MMIC 2dB equalizer chip, 1.1-1.9GHz

Performance characteristics

- Frequency range: 1.1-1.9GHz
- Equalization Amount : 2 dB
- Insertion loss: 0.8dB @ 1.1 GHz , 1.9GHz
- 50Ohm input / output
- 100% on-wafer testing
- Chip size: 0.65 x 0.7 x 0.1mm

Use the limit parameter

Maximum input power	+30dBm
Operating temperature	-55 ~ + 125 °C
storage temperature	-65 ~ +150°C

Product Introduction


GEQ-011019-2A is a GaAs MMIC equalizer chip with a frequency range of 1.1 GHz ~1.9 GHz , an equalization amount of 2 dB , and an input / output standing wave of 1.8/1.8.

Electrical performance parameters (TA = +25°C)


Index	Minimum	Typical Value	Maximum	unit
Frequency Range	1.1~1.9			G Hz
Balance	-	2	-	dB
Input / output return loss	-	14/14	-	dB

Main index test curve

Insertion Loss vs. Operating Frequency

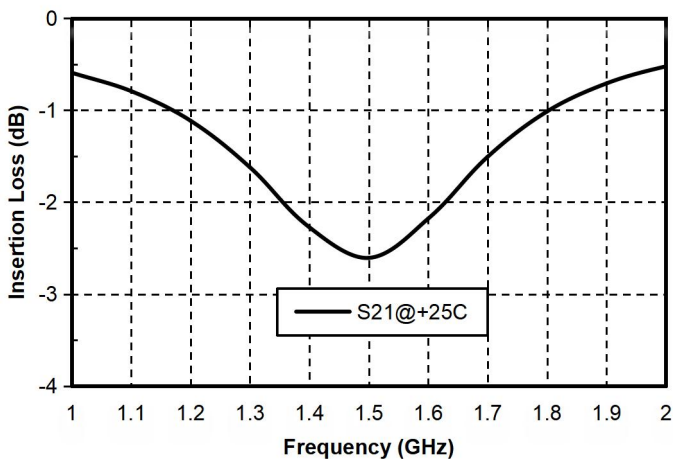

Input /Output Return Loss vs. Operating Frequency

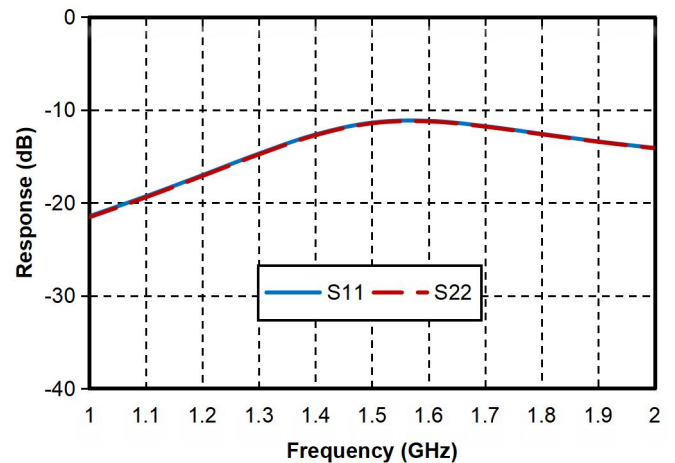

Appearance and structure (the units in the figure are all micrometers , the external dimension tolerance is $\pm 50\mu\text{m}$)

Recommended assembly drawing

