

## GaAs MMIC Limiter Chip, 1-20GHz

### Performance characteristics

- Frequency Range: 1 - 20 GHz
- Insertion loss : 0.3 dB (typ.)
- Clipping level: 16dBm
- Power handling: 37dBm (CW)
- 50Ohm input / output
- 100% on-wafer testing
- Chip size: 1.42 x 0.6 x 0.1 mm

### Product Introduction

GLM-0120A is a GaAs MMIC limiter with a frequency range of 1~20GHz , 50Ω input/output, 0.3dB within the operating frequency band , 1.2 input and output standing wave , and 5W burnout resistance. The chip integrates an output DC blocking capacitor . The chip uses an on-chip through-hole metallization process to ensure good grounding, does not require additional grounding measures, and is simple and convenient to use. The back of the chip is metallized and is suitable for eutectic sintering or conductive adhesive bonding processes.

#### Use restriction parameter <sup>1</sup>

Maximum input power	+37dBm
Operating temperature	-55 ~ + 125 °C
Storage temperature	-65 ~ +150°C

【1】 Exceeding any of these maximum limits may cause permanent damage.


#### Electrical performance parameters ( TA = +25°C)

Index	Minimum	Typical Value	Maximum	Unit
Frequency Range	1-20			GHz
Insertion loss	-	0.4	-	dB
Input return loss	-	19		dB
Output return loss	-	18		dB
Clipping level	-	16	-	dBm
Anti-burning power		37		dBm


## GaAs MMIC Limiter Chip, 1-20GHz

### Main index test curve


Insertion Loss vs. Operating Frequency

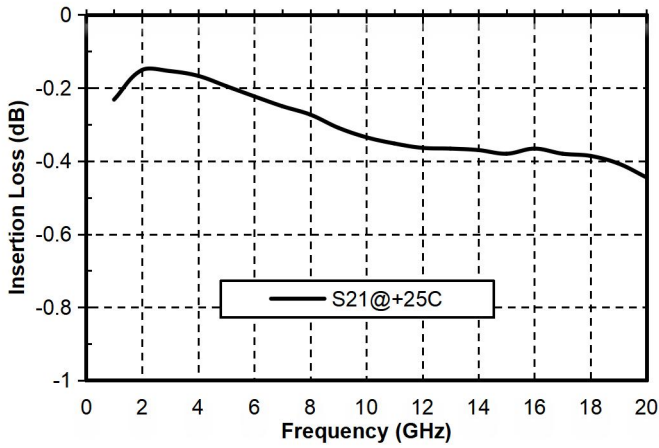


Input Standing Wave vs. Operating Frequency

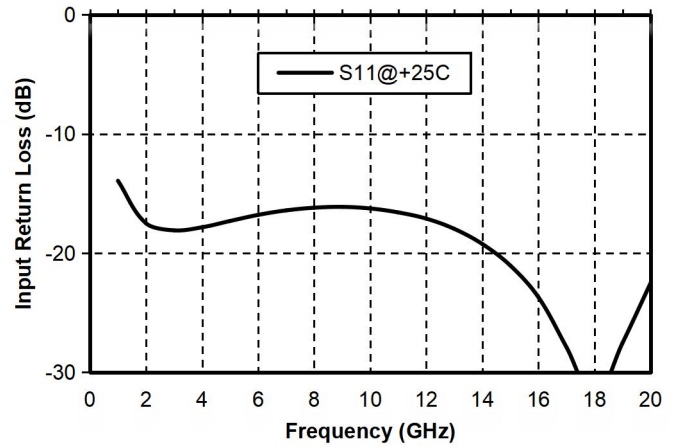

Output Standing Wave vs. Operating Frequency

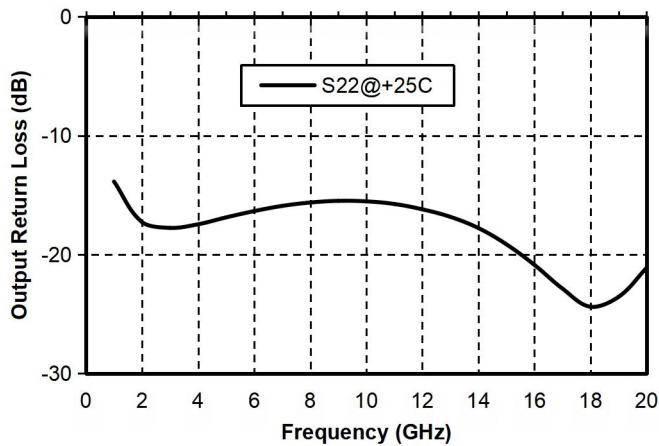

Clipping Level @2G, 8G, 10G, 12G & 18G

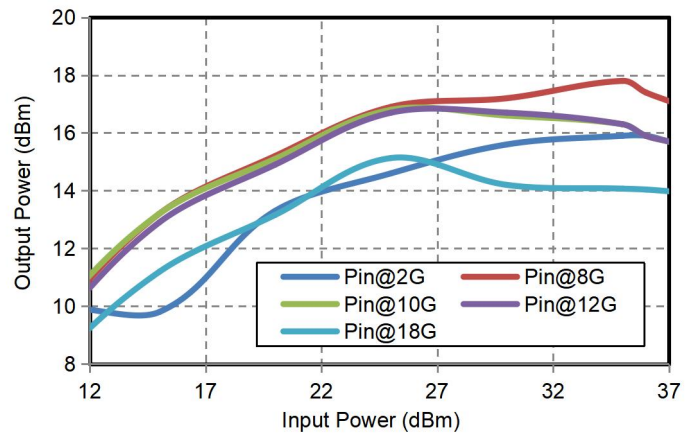

### Appearance structure <sup>2</sup>



【 2 】 The units in the figure are all micrometers ( dimensional tolerance: ±100um.)

## GaAs MMIC Limiter Chip, 1-20GHz

### Recommended assembly drawing



### Bonding point definition

Bonding point number	Function Symbol	Functional Description
1	RF COMM	RF signal input terminal , no DC blocking capacitor , external DC blocking capacitor is recommended
2	RF OUTPUT	RF signal output terminal , with DC blocking capacitor
Chip bottom	GND	The bottom of the chip needs to be well grounded to RF and DC

### Precautions for use

- The chip needs to be stored in an anti-static container and kept in a nitrogen environment.
- bare die surface using wet chemical methods .
- Please strictly comply with ESD protection requirements to avoid electrostatic damage to bare chips.
- General operation: Please use precision pointed tweezers to pick up bare chips. Avoid touching the chip surface with tools or fingers during operation.
- Rack mounting operation suggestions: Bare chip mounting can be done by AuSn solder eutectic sintering or conductive adhesive bonding. The mounting surface must be clean and flat.
- Sintering process: It is recommended to use AuSn solder sheets with a gold -tin ratio of 80/20 . The working surface temperature reaches 255 °C and the tool ( vacuum chuck ) temperature reaches 265 °C. When the high-temperature mixed gas (nitrogen-hydrogen ratio of 90/10 ) is blown to the chip, the temperature at the top of the tool should be raised to 290 °C. Do not let the chip exceed 320 °C for more than 20 seconds. The friction time should not exceed 3 seconds.
- Bonding process: The amount of conductive glue dispensed should be as small as possible. After the chip is placed in the installation position , the conductive glue should be vaguely visible around it . For curing conditions, please follow the information provided by the conductive glue manufacturer.
- Bonding operation suggestions: Use  $\Phi 0.025\text{mm}$  (1mil) gold wire for both ball and wedge bonding .

---

Thermo-ultrasonic bonding temperature is 150 °C. The pressure of the wedge for ball bonding is 40~50gf , and the pressure of the wedge bonding is 18~22gf . Use the smallest possible ultrasonic energy. The bonding starts at the pressure point on the chip and ends at the package (or substrate) .