

## 0.1-40GHz Programmable Amplifier

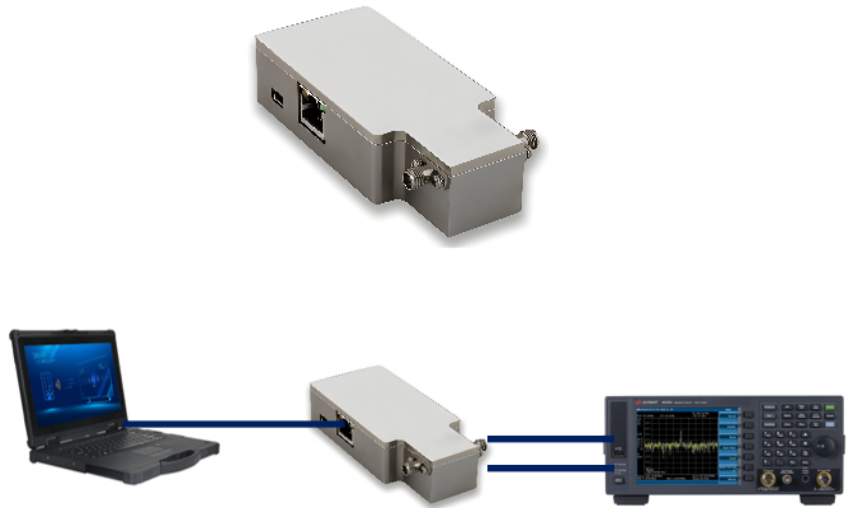


Fig: application and test block diagram

- Frequency: 0.1 to 40 GHz
- Gain Adjust Range:-15~+15dB
- Step size: 0.5 dB
- P-1:18dBm(full gain)
- Fast state time:1ms
- Control Interface:USB and Ethernet