

0.1-40GHz Programmable Attenuator

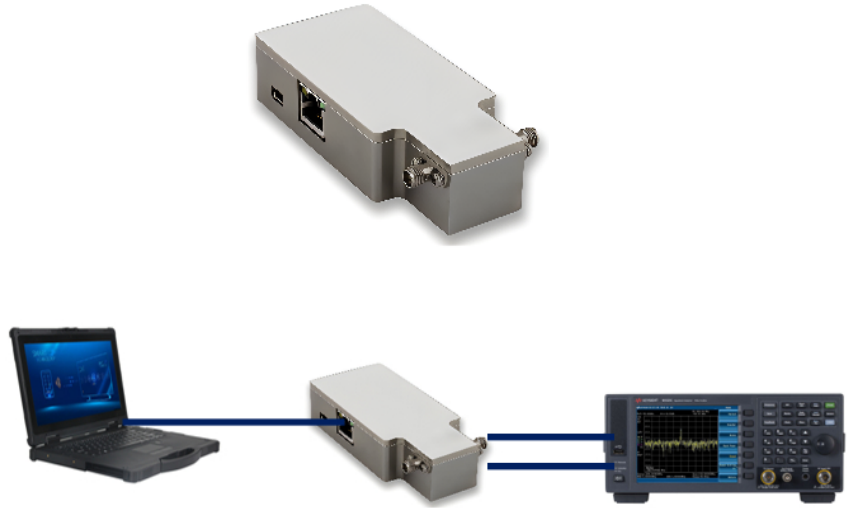


Fig: application and test block diagram

Frequency: 0.1 to 40 GHz
Adjust Range:120dB
Step size: 0.5/0.25/0.125dB
Max Power:24dBm
Fast state time:10ms
Control Interface:USB and Ethernet