

1.25-20GHz Programmable Signal Generator

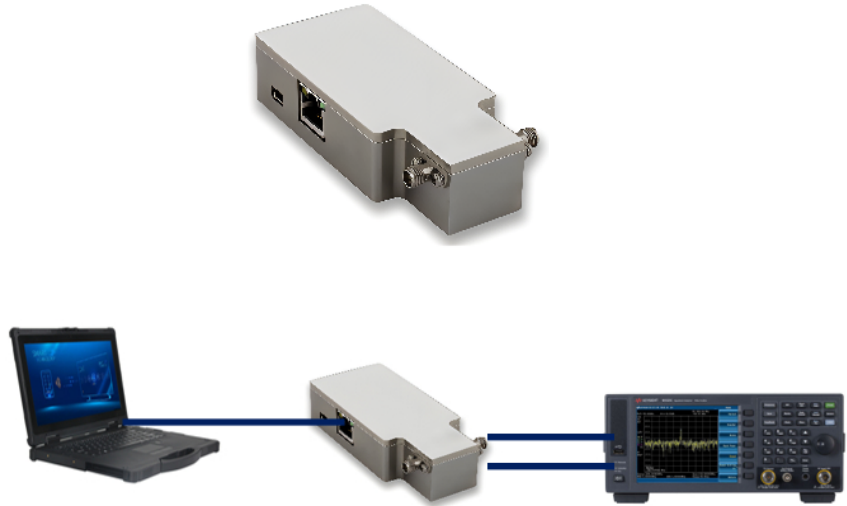


Fig: application and test block diagram

- Frequency: 1.25 to 20GHz
- Freq. Step: 10KHz~100MHz
- Output Power: 5dBm
- External Ref Available: 100MHz
- Phase Noise: -98dBc/Hz@1K/4~8GHz
- Control Interface: USB and Ethernet