

GaAs MMIC 6dB Equalizer Chip , 2-18 GHz

Performance characteristics

- Frequency range: 2-18GHz
- Equalization Amount : 6 dB
- Insertion loss: 0.5dB@18GHz
- 50Ohm input / output
- 100% on-wafer testing
- Chip size: 0.72 x 0.65 x 0.1mm

Use the limit parameter

Maximum input power	+30dBm
Operating temperature	-55 ~ + 125 °C
storage temperature	-65 ~ +150°C

Product Introduction


GEQ-02186 is a GaAs MMIC equalizer chip with a frequency range of 2 GHz to 18 GHz , an equalization amount of 6 dB , and an input / output standing wave of 1.1/1.1.

Electrical performance parameters (TA = +25°C)


index	Minimum	Typical Value	Maximum	unit
Frequency Range	2-18			G Hz
Balance		6		dB
Input / output return loss	-	30/26	-	dB

Main index test curve

Insertion Loss vs. Operating Frequency

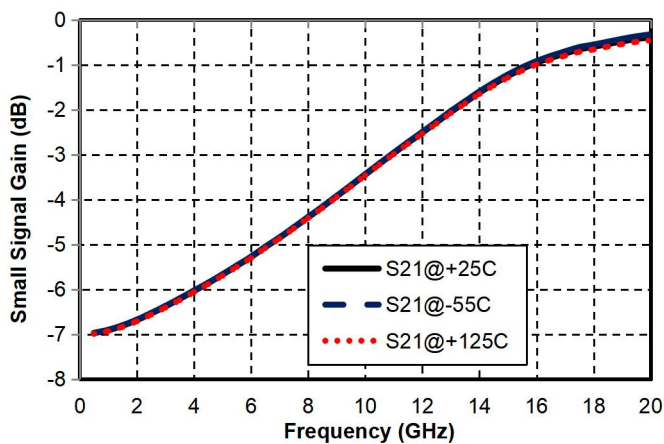

Input /Output Return Loss vs. Operating Frequency

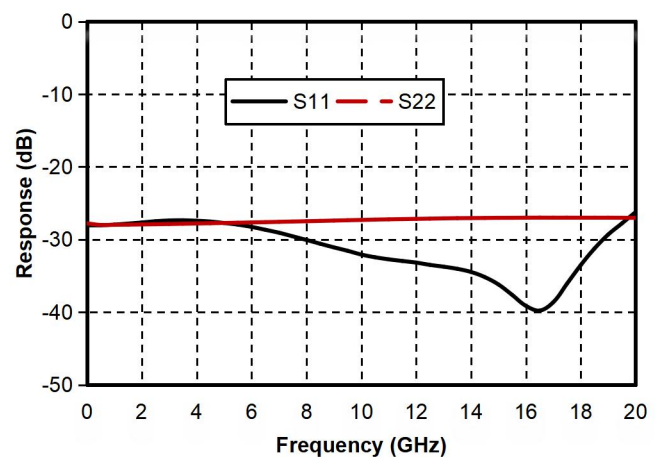

Appearance and structure (units in the figure are all microns)

Recommended assembly drawing

