

GaAs MMIC 5dB Equalizer Chip , 6-18GHz

Performance characteristics

- Frequency range: 6-18 GHz
- Equalization Amount : 5 dB
- Insertion loss: 0.4dB@18GHz
- 50Ohm input / output
- 100% on-wafer testing
- Chip size: 0.64 x 0.74 x 0.1mm

Use the limit parameter

Maximum input power	+30dBm
Operating temperature	-55 ~ +85°C
storage temperature	-65 ~ +150°C

Product Introduction


GEQ-06185B-Pr is a GaAs MMIC equalizer chip with a frequency range of 6 GHz to 18 GHz , an equalization amount of 5 dB , and an input / output standing wave of 1.1/1.1.

Electrical performance parameters(TA = +25°C)


Index	Minimum	Typical Value	Maximum	unit
Frequency Range	6-18			G Hz
Balance		5		dB
Input / output return loss	-	22/23	-	dB

Main index test curve


Insertion Loss vs. Operating Frequency

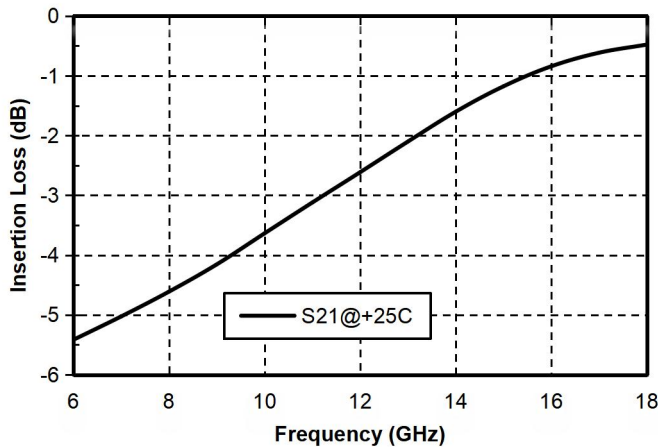

Input /Output Return Loss vs. Operating Frequency

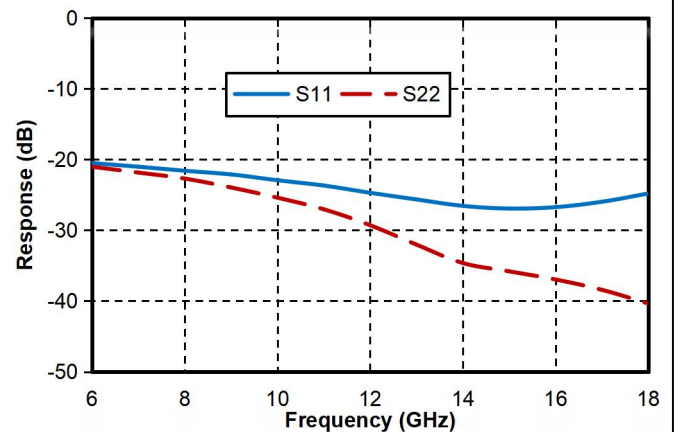

Appearance and structure (units in the figure are all microns)
(Dimensional tolerance: ±100um.)



Recommended assembly drawing

